




## TECHNICAL SHEET FA 20 400 20

### WIRE ROPE RETRACTABLE FALL ARRESTER, LENGTH 20 M

*Olympe*

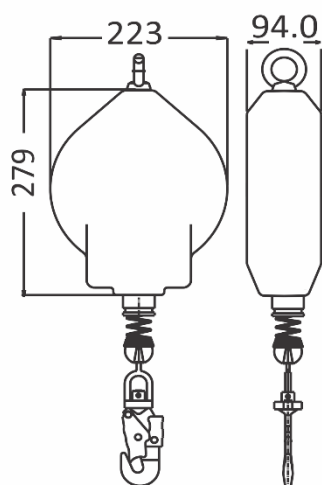

- Comes with Galvanized Steel Wire Rope of diam. 4.5 mm.
- Casing made up of high impact strength Polymer, to prevent breakage.
- Handle with special grip for a perfect comfort during carrying.
- Swivel at the top and at the bottom of the device.
- Internal braking mechanism to reduce the fall arrest force to less than 6kN.

**Minimum breaking strength** > 12 kN.

**Connectors:** Swivel and FA 50 101 17 at anchorage end, FA 50 203 20 with load indicator at attachment end.

**Average locking speed** : 1.6 m/s

**Maxi weight for vertical use:** 140 kg.

**Compliance:** EN 360:2002.

**Material of components:**

Protective casing: PA 6 30% fiberglass

Wire rope: Galvanized steel

Connectors: Steel

Length :	<b>CE</b>	Weight :
20 m		7.22 kg

**KRATOS SAFETY**  
689 Chemin du Buclay  
38540 HEYRIEUX – FRANCE

Tel : +33 (0)4 72 48 78 27  
Fax : +33 (0)4 72 48 58 32

[www.kratossafety.com](http://www.kratossafety.com) / [info@kratossafety.com](mailto:info@kratossafety.com)

**HS CODE**

8428 90 90

**CARTON SIZE / PIECES**

60 x 40 x 24 cm / 2

AET N°4023 I12 E1

Satra Technology Centre, N°0321  
Wyndham Way, Telford Way, Kettering  
Northamptonshire, NN16 8SD, United Kingdom

**ARTICLE 11 GB07/73551**

SGS United Kingdom Ltd., N°0120  
Unit 202B, Worle Parkway,  
Weston-super-Mare, BS22 6WA, United Kingdom